


## STPDACsw - Fully digital high efficiency power audio amplifier

### Features

- Output power 2 x 70W / 1 x 250W @ THD<1%
- I<sup>2</sup>S input ( $F_S = 38$  to 48kHz)
- PWM output ( $F_{PWM} = F_S \times 8$ )
- MCLK input =  $256 \times F_S$
- Operation on 24bit
- $\pm 30V$  supply voltage (Max.)
- St-by
- Mute
- Stereo/bridge operation selection
- Protections against short circuit across the load
- Chip thermal protection
- External temperature sensor possibility
- Thermal warning pins
- Adjustable clip detector pin

### Description

The TDA7571 i is a fully digital switchmode power audio amplifier with I<sup>2</sup>S digital input and PWM output.

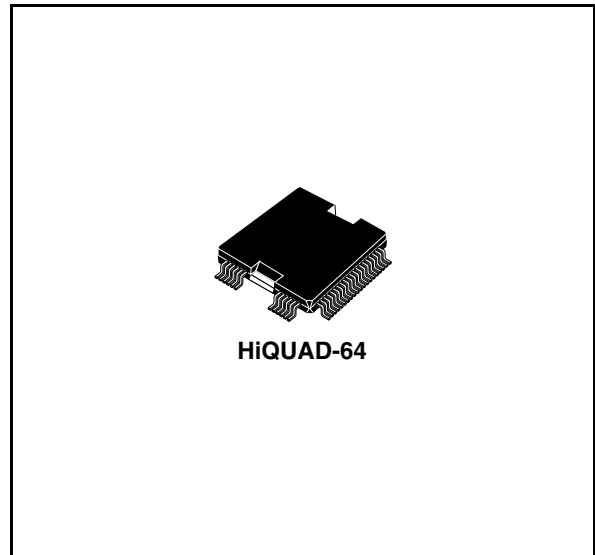

The maximum output current and voltage swing are depending by the output circuitry (power supply, external power transistors and sensing resistors). The device can work as a stereo single-ended channels or a mono bridge power amplifier.

**Table 1. Device summary**


| Order code | Package   | Packing |
|------------|-----------|---------|
| TDA7571    | HiQUAD-64 | Tray    |

# Contents

|          |                                                                                           |           |
|----------|-------------------------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Block and simplified application diagram</b>                                           | <b>3</b>  |
| <b>2</b> | <b>Pin description</b>                                                                    | <b>4</b>  |
| <b>3</b> | <b>Electrical specifications</b>                                                          | <b>7</b>  |
| 3.1      | Absolute maximum ratings                                                                  | 7         |
| 3.2      | Thermal data                                                                              | 7         |
| 3.3      | Electrical characteristics                                                                | 7         |
| 3.4      | Notes on the electrical schematic shown in <a href="#">Figure 3</a> and <a href="#">4</a> | 13        |
| 3.4.1    | Main characteristics                                                                      | 13        |
| <b>4</b> | <b>Functions, pins and components description</b>                                         | <b>14</b> |
| 4.1      | Short circuit protection current calculation                                              | 14        |
| 4.2      | External thermal protection network                                                       | 14        |
| 4.3      | Internal thermal protection network                                                       | 15        |
| 4.4      | Feedback                                                                                  | 15        |
| 4.5      | Gate driving network                                                                      | 15        |
| 4.6      | PLL                                                                                       | 16        |
| 4.7      | Dither                                                                                    | 16        |
| 4.8      | External connections description                                                          | 17        |
| 4.8.1    | CD, THWEXT, THWINT                                                                        | 17        |
| 4.8.2    | MUTE                                                                                      | 17        |
| 4.8.3    | ST-BY - St-By pin.                                                                        | 17        |
| 4.8.4    | +Vs-low -                                                                                 | 17        |
| 4.8.5    | DATA, SEL, SCK                                                                            | 17        |
| 4.8.6    | MCLK                                                                                      | 17        |
| 4.8.7    | DGND                                                                                      | 17        |
| 4.8.8    | BRIDGE and L/R                                                                            | 17        |
| 4.9      | Components with critical placement and type                                               | 18        |
| <b>5</b> | <b>Package information</b>                                                                | <b>19</b> |
| <b>6</b> | <b>Revision history</b>                                                                   | <b>20</b> |

# 1 Block and simplified application diagram

Figure 1. Block and simplified application diagram

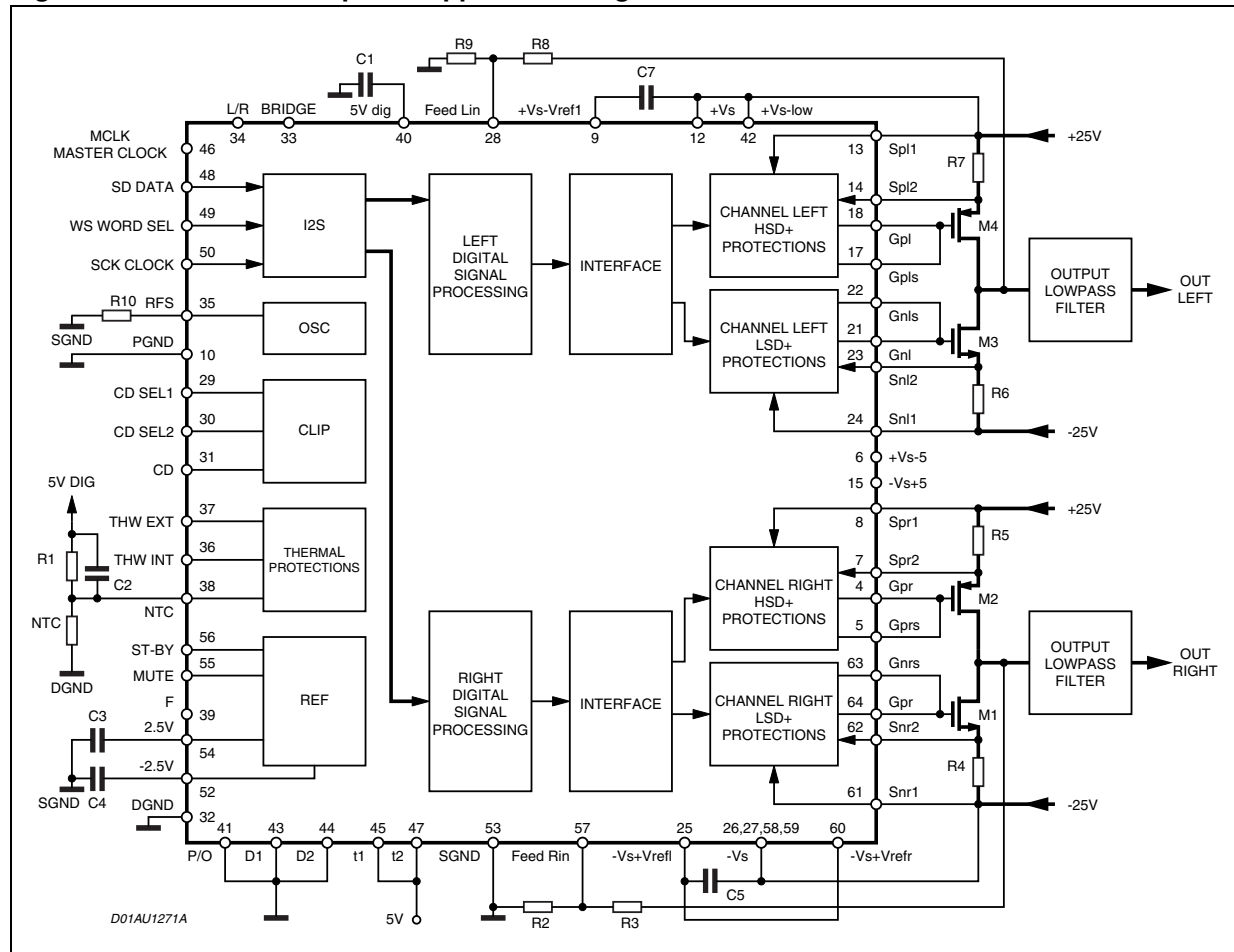

## 2 Pin description

Figure 2. Pins connection diagram (top view)

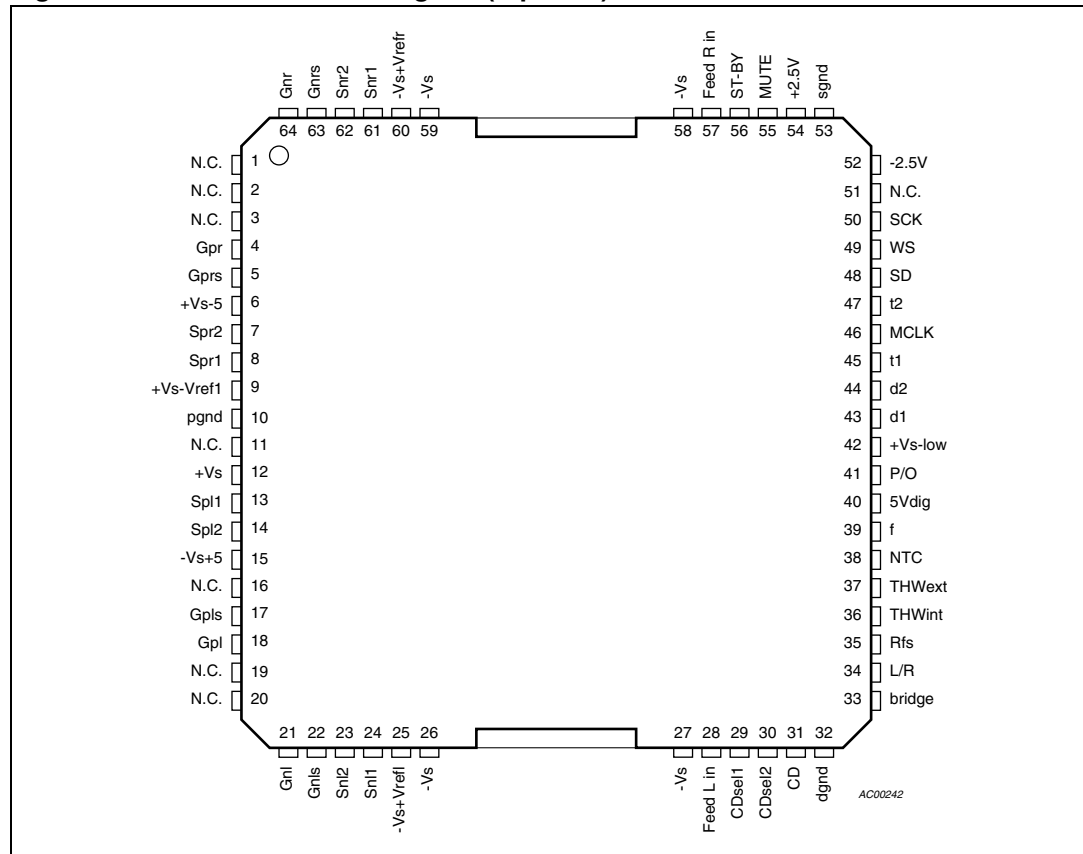


Table 2. Pins description

| Pin number | Name      | Function                       | Voltage limit (low) | Voltage limit (high) |
|------------|-----------|--------------------------------|---------------------|----------------------|
| 1          | N.C.      | Not connected                  |                     |                      |
| 2          | N.C.      | Not connected                  |                     |                      |
| 3          | N.C.      | Not connected                  |                     |                      |
| 4          | Gpr       | Gate PMOS, right channel       | +Vs-12V             | 30V                  |
| 5          | Gprs      | Sense gate PMOS, right channel | +Vs-12V             | 30V                  |
| 6          | +Vs-5     |                                | +Vs-6               |                      |
| 7          | Spr2      | Sensing 2 PMOS, right channel  |                     | 30V                  |
| 8          | Spr1      | Sensing 1 PMOS, right channel  |                     | 30V                  |
| 9          | +Vs-Vref1 | Supply drivers PMOS            | +Vs-12V             | 30V                  |
| 10         | pgnd      | Power ground                   | 0 (ref.)            |                      |
| 11         | N.C.      | Not connected                  |                     |                      |

**Table 2. Pins description (continued)**

| Pin number | Name      | Function                                                | Voltage limit (low) | Voltage limit (high) |
|------------|-----------|---------------------------------------------------------|---------------------|----------------------|
| 12         | +Vs       | Positive power supply                                   |                     | 30V                  |
| 13         | Spl1      | Sensing 1 PMOS, left channel                            |                     | 30V                  |
| 14         | Spl2      | Sensing 2 PMOS, left channel                            |                     | 30V                  |
| 15         | -Vs+5     |                                                         |                     | -Vs+6                |
| 16         | N.C.      | Not connected                                           |                     |                      |
| 17         | Gpls      | Sense gate PMOS, left channel                           | +Vs-12V             | 30V                  |
| 18         | Gpl       | Gate PMOS, left channel                                 | +Vs-12V             | 30V                  |
| 19         | N.C.      | Not connected                                           |                     |                      |
| 20         | N.C.      | Not connected                                           |                     |                      |
| 21         | Gnl       | Gate NMOS, left channel                                 | -30V                | -Vs+12V              |
| 22         | Gnls      | Gate NMOS, left channel                                 | -30V                | -Vs+12V              |
| 23         | Snl2      | Sensing 2 NMOS, left channel                            | -30V                |                      |
| 24         | Snl1      | Sensing 1 NMOS, left Channel                            | -30V                |                      |
| 25         | -Vs+Vrefl | Supply drivers NMOS. left channel                       | -30V                | -Vs+12V              |
| 26         | -Vs       | Negative power supply                                   | -30V                |                      |
| 27         | -Vs       | Negative power supply                                   | -30V                |                      |
| 28         | Feed L in | Feedback network left channel                           | -5V                 | 5V                   |
| 29         | CDsel1    | Clip detector selection 1                               |                     | 5.5V                 |
| 30         | CD sel2   | Clip detector selection 2                               |                     | 5.5V                 |
| 31         | CD        | Clip detector output                                    |                     | 5.5V                 |
| 32         | dgnd      | Digital ground                                          | 0 (ref)             |                      |
| 33         | bridge    | Stereo / bridge selection pin<br>0 = Stereo; 1 = Bridge |                     | 6V                   |
| 34         | L / R     | Bridge Left/Right Selection<br>1 = Right; 0 = Left      |                     | 6V                   |
| 35         | Rfs       | pcm-pwm gain conversion resistor                        |                     | 6V                   |
| 36         | THWint    | Internal thermal warning output                         |                     | 5.5V                 |
| 37         | THWext    | External thermal warning output                         |                     | 5.5V                 |
| 38         | NTC       | Sensing resistors network                               |                     | 5.5V                 |
| 39         | f         |                                                         |                     | 6V                   |
| 40         | 5Vdig     | Digital 5V supply output                                |                     | 6V                   |
| 41         | P/O       | PLL/FREE running osc. option                            |                     | 6V                   |
| 42         | +Vs-low   | Positive voltage supply low power                       |                     | 30                   |
| 43         | d1        | Dither 1                                                |                     | 6V                   |
| 44         | d2        | Dither 2                                                |                     | 6V                   |

**Table 2. Pins description (continued)**

| Pin number | Name      | Function                           | Voltage limit (low) | Voltage limit (high) |
|------------|-----------|------------------------------------|---------------------|----------------------|
| 45         | t1        |                                    |                     | 6V                   |
| 46         | MCLK      | Master clock input (256 x fs)      |                     | 6V                   |
| 47         | t2        |                                    |                     | 6V                   |
| 48         | SD        | I2S serial data                    |                     | 6V                   |
| 49         | WS        | I2S word select                    |                     | 6V                   |
| 50         | SCK       | I2S serial clock                   |                     | 6V                   |
| 51         | N.C.      | Not connected                      |                     |                      |
| 52         | -2.5V     | Signal -2.5V supply output         | -2.75V              |                      |
| 53         | sgnd      | Signal ground                      | 0 (ref)             |                      |
| 54         | +2.5V     | Signal 2.5V supply output          |                     | 2.75V                |
| 55         | MUTE      | Mute input                         |                     | 5.5V                 |
| 56         | ST-BY     | Stand by input                     |                     | 6V                   |
| 57         | Feed R in | Feedback network right channel     | -5                  | 5V                   |
| 58         | -Vs       | Negative voltage supply            | -30V                |                      |
| 59         | -Vs       | Negative voltage supply            | -30V                |                      |
| 60         | -Vs+Vrefr | Supply drivers NMOS. Right channel | -30V                | -Vs+12V              |
| 61         | Snr1      | Sensing 2 NMOS, right channel      | -30V                |                      |
| 62         | Snr2      | Sensing 1 NMOS, right channel      | -30V                |                      |
| 63         | Gnrs      | Sense gate NMOS, right channel     | -30V                | -Vs+12V              |
| 64         | Gnr       | Gate NMOS, right channel           | -30V                | -Vs+12V              |

## 3 Electrical specifications

### 3.1 Absolute maximum ratings

**Table 3. Absolute maximum ratings**

| Symbol    | Parameter                             | Value      | Unit |
|-----------|---------------------------------------|------------|------|
| $\pm V_S$ | Operating supply voltage              | $\pm 30$   | V    |
| $T_j$     | Junction temperature, operating range | -40 to 150 | °C   |
| $T_{stg}$ | Storage temperature, operating range  | -55 to 150 | °C   |

### 3.2 Thermal data

**Table 4. Thermal data**

| Symbol           | Parameter                           | Value | Unit |
|------------------|-------------------------------------|-------|------|
| $R_{th\ j-case}$ | Thermal resistance junction to case | 3     | °C/W |

### 3.3 Electrical characteristics

**Table 5. Electrical characteristics**

( $V_S = \pm 25V$ ,  $R_L = 4\Omega$ ,  $f = 1kHz$ ,  $T_j = 25^\circ C$ ,  $F_S = 44.1kHz$ , Single-Ended, application circuit shown in [Figure 3](#), 2 x 65W/1 x 130W system, unless otherwise specified.)

| Symbol      | Parameter                        | Test condition                             | Min.     | Typ. | Max.     | Unit |
|-------------|----------------------------------|--------------------------------------------|----------|------|----------|------|
| $\pm V_S$   | Operating supply voltage         |                                            | $\pm 12$ |      | $\pm 30$ | V    |
| $I_q$       | Quiescent supply current         | $V_{st-by} = 5V$ from $+V_S$               |          | 25   |          | mA   |
|             |                                  | $V_{st-by} = 5V$ from $+V_{S-low}$         |          | 20   |          | mA   |
|             |                                  | $V_{st-by} = 5V$ from $-V_S$               |          | 25   |          | mA   |
| $I_{st-by}$ | Quiescent supply current         | $V_{st-by} = 0$ from $+V_S$                |          | 0.3  |          | mA   |
|             |                                  | $V_{st-by} = 0$ from $+V_{S-low}$          |          | 0.2  |          | mA   |
|             |                                  | $V_{st-by} = 0$ from $-V_S$                |          | 0.3  |          | mA   |
| $V_{os}$    | Output offset voltage            | Output-GND (single-ended)                  |          |      | 250      | mV   |
| $V_{os}$    | Output offset voltage            | Output L - Output R (bridge)               |          |      | 250      | mV   |
| $P_o$       | Output power                     | Single-ended, @ THD = 1%<br>2 x 70W system |          | 70   |          | W    |
| $P_o$       | Output power                     | Bridge, @ THD = 1%<br>1 x 250W system      |          | 250  |          | W    |
| $P_d$       | Power dissipation of the TDA7571 | @ $P_{out} = 25\ W$ , bridge configuration |          | 1.75 |          | W    |

**Table 5. Electrical characteristics (continued)**

( $V_S = \pm 25V$ ,  $R_L = 4\Omega$ ,  $f = 1kHz$ ,  $T_j = 25^\circ C$ ,  $F_S = 44.1kHz$ , Single-Ended, application circuit shown in [Figure 3](#), 2 x 65W/1 x 130W system, unless otherwise specified.)

| Symbol       | Parameter                                                                   | Test condition                                                                                           | Min. | Typ.           | Max. | Unit    |
|--------------|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------|----------------|------|---------|
| $P_{dt}$     | Power dissipation of the external power transistors                         | @ $P_{out} = 25W$ , bridge configuration, 1x250W system                                                  |      | 10             |      | W       |
| THD          | Total harmonic distortion                                                   | @ $P_{out} = 10 W$ , single ended                                                                        |      | 0.1            |      | %       |
|              |                                                                             | @ $P_{out} = 40 W$ , bridge                                                                              |      | 0.05           |      | %       |
| $V_{ohs}$    | Half scale output voltage                                                   | single-ended, output voltage @ $IN = -6dBFS$                                                             |      | 10             |      | Vrms    |
| $E_n$        | Output noise @ $IN = -999dBFS$                                              | "A" weighted, single-ended<br>"A" weighted, bridge                                                       |      | 180<br>100     |      | $\mu V$ |
| DR           | Dynamic range                                                               | "A" weighted, -60dBFS, Single-ended PLL option circuit                                                   |      | 85             |      | dB      |
|              |                                                                             | "A" weighted, -60dBFS, Bridge free running oscillation option                                            |      | 96             |      | dB      |
| S/N          | Signal-to-noise ratio (noise floor)                                         | "A" weighted, single-ended<br>"A" weighted, bridge                                                       |      | 100<br>110     |      | dB      |
| $G_e$        | Gain error                                                                  | $f = 1kHz$                                                                                               |      |                | 1.5  | dB      |
| $\Delta G_e$ | Delta gain error between channels                                           | $f = 1kHz$                                                                                               |      |                | 0.2  | dB      |
| $c_t$        | Crosstalk                                                                   | $f = 1kHz$ , $V_o = 1Vrms$                                                                               |      | 60             |      | dB      |
| $V_{gsph}$   | Threshold voltage of the Pchannel $V_{gs}$ sensor ( $VS_{px1} - VG_{pxs}$ ) |                                                                                                          | 2.5  | 3              | 3.5  | V       |
| $V_{gsnth}$  | Threshold voltage of the Pchannel $V_{gs}$ sensor ( $VS_{nxs} - VS_{nx1}$ ) |                                                                                                          | 2.5  | 3              | 3.5  | V       |
| $A_m$        | Mute attenuation                                                            | $V_o = 1Vrms$                                                                                            | 80   | 90             |      | dB      |
| SVR          | Supply voltage rejection                                                    | $f = 100Hz$ , $V_r = 0.5V$                                                                               | 50   | 60             |      | dB      |
| $F_{SW}$     | Switching frequency                                                         |                                                                                                          |      | $F_S \times 8$ |      | KHz     |
| $V_{il}$     | 3.3V Logic inputs low level voltage                                         | pin: ST-BY, MUTE, SD, WS, SCK, MCLK bridge                                                               |      |                | 1.5  | V       |
| $V_{ih}$     | 3.3V Logic inputs high level voltage                                        |                                                                                                          | 2.3  |                |      | V       |
| $V_{il}$     | 5V Logic inputs low level voltage                                           | pin: L/R, CD SEL1, CD SEL2, P/O, D1, D2. (these pins are typically connected to the DGND or 5V dig pins) |      |                | 1.5  | V       |
| $V_{ih}$     | 5V Logic inputs high level voltage                                          |                                                                                                          | 3.5  |                |      | V       |



**Table 5. Electrical characteristics (continued)**

( $V_S = \pm 25V$ ,  $R_L = 4\Omega$ ,  $f = 1kHz$ ,  $T_J = 25^\circ C$ ,  $F_S = 44.1kHz$ , Single-Ended, application circuit shown in [Figure 3](#), 2 x 65W/1 x 130W system, unless otherwise specified.)

| Symbol            | Parameter                                                                        | Test condition                               | Min.                      | Typ.                     | Max.                      | Unit |
|-------------------|----------------------------------------------------------------------------------|----------------------------------------------|---------------------------|--------------------------|---------------------------|------|
| Clip detector     |                                                                                  |                                              |                           |                          |                           |      |
| V <sub>cd</sub>   | Clip detector pin operating voltage (open drain)                                 |                                              |                           |                          | 10                        | V    |
| CDI               | Clip detector pin leakage current                                                | CD off                                       |                           |                          | 1                         | μA   |
| CDs               | Clip detector pin saturation voltage                                             | CD on, 1mA                                   |                           |                          | 1                         | V    |
| CDi               | Clip detector THD intervention                                                   | CDsel1=0, CDsel2=0 (near clipping detection) |                           |                          | 0.5                       | %    |
|                   |                                                                                  | CDsel1=0, CDsel2=1                           |                           | 1                        |                           | %    |
|                   |                                                                                  | CDsel1=1, CDsel2=0                           |                           | 5                        |                           | %    |
|                   |                                                                                  | CDsel1=1, CDsel2=1                           |                           | 8                        |                           | %    |
| Protections       |                                                                                  |                                              |                           |                          |                           |      |
| T <sub>hwc</sub>  | Chip thermal warning intervention                                                |                                              | 135                       | 150                      | 165                       | °C   |
| T <sub>sdc</sub>  | Thermal shut-down chip                                                           |                                              | 145                       | 160                      | 175                       | °C   |
| T <sub>sdch</sub> | Thermal shut-down chip hysteresis                                                |                                              | 7                         | 10                       | 13                        | °C   |
| T <sub>hws</sub>  | External thermal warning intervention                                            |                                              | 5V <sub>dig</sub> x 0.45  | 5V <sub>dig</sub> x 0.48 | 5V <sub>dig</sub> x 0.51  | V    |
| T <sub>sds</sub>  | External shut-down intervention                                                  |                                              | 5V <sub>dig</sub> x 0.37  | 5V <sub>dig</sub> x 0.4  | 5V <sub>dig</sub> x 0.43  | V    |
| T <sub>sdsh</sub> | External thermal shut-down hysteresis                                            |                                              | 5V <sub>dig</sub> x 0.037 | 5V <sub>dig</sub> x 0.04 | 5V <sub>dig</sub> x 0.043 | V    |
| V <sub>pp</sub>   | Protection intervention voltage Pchannel (V <sub>spx1</sub> -V <sub>spx2</sub> ) |                                              | 85                        | 100                      | 120                       | mV   |
| V <sub>pn</sub>   | Protection intervention voltage Nchannel (V <sub>snx2</sub> -V <sub>snx1</sub> ) |                                              | 85                        | 100                      | 120                       | mV   |
| I <sub>spx1</sub> | Current input pins 7, 13                                                         |                                              | 150                       | 200                      | 260                       | μA   |
| I <sub>snx1</sub> | Current output pins 7, 13                                                        |                                              | 150                       | 200                      | 260                       | μA   |
| Drivers           |                                                                                  |                                              |                           |                          |                           |      |
| V <sub>hgp</sub>  | High level output voltage (Gpl, Gpr)                                             |                                              |                           | +V <sub>s</sub><br>-10   |                           | V    |
| V <sub>lgp</sub>  | Low level output voltage (Gpl, Gpr)                                              |                                              |                           | +V <sub>s</sub>          |                           | V    |
| V <sub>hgn</sub>  | High level output voltage (Gnl, Gnr)                                             |                                              |                           | -V <sub>s</sub>          |                           | V    |
| V <sub>lgn</sub>  | Low level output voltage (Gnl, Gnr)                                              |                                              |                           | -V <sub>s</sub><br>+10   |                           | V    |
| I <sub>hgp</sub>  | High level output sink current (Gpl, Gpr, peak)                                  |                                              |                           | 2.2                      |                           | A    |

**Table 5. Electrical characteristics (continued)**

( $V_S = \pm 25V$ ,  $R_L = 4\Omega$ ,  $f = 1kHz$ ,  $T_J = 25^\circ C$ ,  $F_S = 44.1kHz$ , Single-Ended, application circuit shown in [Figure 3](#), 2 x 65W/1 x 130W system, unless otherwise specified.)

| Symbol                       | Parameter                                        | Test condition      | Min. | Typ. | Max. | Unit |
|------------------------------|--------------------------------------------------|---------------------|------|------|------|------|
| $I_{Lgp}$                    | Low level output source current (Gpl, Gpr, peak) |                     |      | 2.7  |      | A    |
| $I_{Lgn}$                    | High level output sink current (Gnl, Gnr, peak)  |                     |      | 2.5  |      | A    |
| $I_{Lgn}$                    | Low level output source current (Gnl, Gnr, peak) |                     |      | 1.7  |      | A    |
| <b>Internal power supply</b> |                                                  |                     |      |      |      |      |
| 5Vdig                        | 5Vdig pin output voltage                         | Reference: dgnd pin |      | 5    |      | V    |
| 2.5V                         | 2.5V pin output voltage                          | Reference: sgnd pin |      | 2.5  |      | V    |
| -2.5V                        | -2.5V pin output voltage                         | Reference: sgnd pin |      | -2.5 |      | V    |
| Vref1                        | Vref1 pin output voltage                         | Reference: + Vs pin |      | -10  |      | V    |
| Vrefl/Vrefr                  | Vrefl, Vrefr pin output voltage                  | Reference: - Vs pin |      | 10   |      | V    |





### 3.4 Notes on the electrical schematic shown in [Figure 3](#) and [4](#)

#### 3.4.1 Main characteristics

- 2 channels single-ended or 1 channel bridge PWM amplifier
- Power output: see [Table 5](#)
- [Figure 3](#): PLL option
- [Figure 4](#): free running oscillator option
- Output voltage @ input = -6Bfs:
  - [Figure 3](#): 10Vrms (single ended) - 20Vrms (bridge)
  - [Figure 4](#): 9.5Vrms (single ended) - 19Vrms (bridge)
- Clip detector settled at THD=10%
- No dithering selected

The schematic is depicted showing the suggested structure of the printed circuit board tracks (star points, high current path, components placement).

To avoid malfunctioning due to the parasitic inductance, short connections lengths are recommended.


**Table 6. Component characteristics**

| Components<br>(See schematic of <a href="#">Figure 3 &amp; 3</a> ) | Minimum load:<br>2 x 4 Ohm single-ended<br>or 8 Ohm bridge<br>(2 x 65W / 1 x 130W)<br>(power supply = $\pm 25V$ ) | Minimum load:<br>2 x 2 Ohm single-ended<br>or 4Ohm bridge<br>(2 x 125W / 1 x 250W)<br>(power supply = $\pm 25V$ ) |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| P-MOS-L<br>P-MOS-R                                                 | STP12PF06                                                                                                         | 2 x STP12PF06<br>in parallel                                                                                      |
| N-MOS-L<br>N-MOS-R                                                 | STP14NF06                                                                                                         | 2 x STP14NF06<br>in parallel                                                                                      |
| Rp-N-L2<br>RP-P-L2<br>Rp-N-R2<br>Rp-P-R2                           | Not present                                                                                                       | 4.7K                                                                                                              |

## 4 Functions, pins and components description

### 4.1 Short circuit protection current calculation

Figure 5. Short circuit protection current diagram

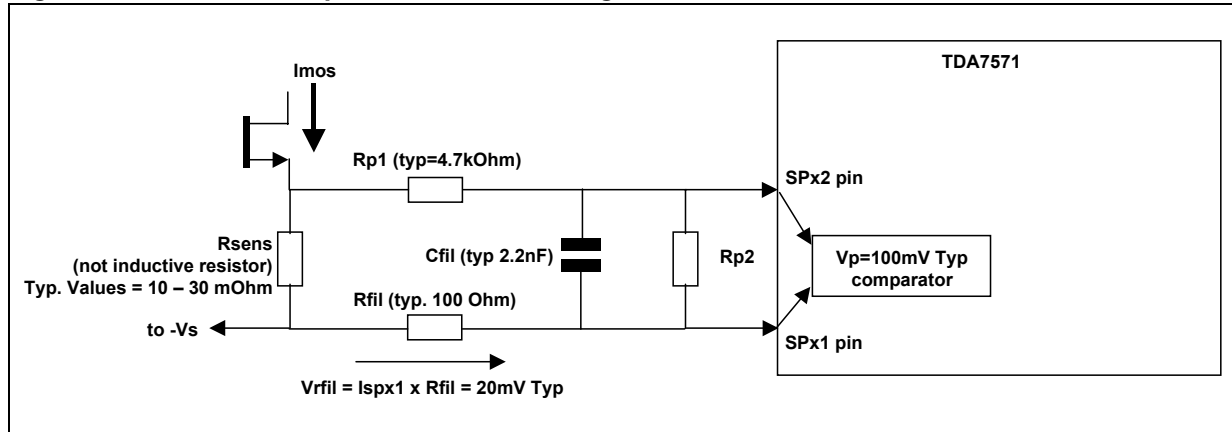

$$I_{lim} = \frac{1}{R_{sens}} \left( \frac{V_{px} \cdot (R_{p1} + R_{p2})}{R_{p2}} + V_{fil} \right)$$

$$I_{lim} = \frac{1}{R_{sens}} (V_{px} + V_{fil}) \quad \leftarrow \text{if } R_{p2} \text{ is not used}$$

### 4.2 External thermal protection network

The purpose of this function is to sense critical points of the amplifier system, as example the heatsink of the power transistors, avoiding too high temperature.

Through the external thermal warning pin (THWEXT, pin 37), a signal useful to reduce the power dissipation reducing (as example) the output power and/or, in a system provided of regulated power supply, reducing the voltage supply of the amplifier ( $\pm V_S$ ) is present.

Example of external thermal protection circuitry

- Components:
  - type: B57621 C621/100k/+
  - Text = 10K
- Results (simulations):
  - External thermal warning temperature intervention: 90 °C
  - External thermal shut down temperature intervention: 100 °C
  - External thermal shut down hysteresis: 6°C

### 4.3 Internal thermal protection network

The purpose of this function is to sense the chip temperature. Because of the power dissipation of this device is almost constant (is not dependent by the output power), the system must be designed to avoid chip temperature higher than 140 °C.

The internal thermal protection is intended to avoid dangerous situations due to, as example, damaged power transistors (gate-source shorted) or bad environments conditions.

Through the internal thermal warning pin (THWINT, pin 36), a signal useful to switch-off the system or, at least, reduce the power dissipation reducing (as example) the output power and/or, in a system provided of regulated power supply, reducing the voltage supply of the amplifier ( $\pm V_s$ ) is present.

### 4.4 Feedback

The resistors Rgain-L1, Rgain-L2 for the Left channel and Rgain-R1, Rgain-R2 for the Right channel defines the output AC voltage with a specific input digital data.

In the example, with 3.9Kohm and 1kohm, as shown in the schematic, the output voltage @ input = -6dBFS, is indicated in the Main characteristics description. These values are needed to reach the clipping with 0dBFS input digital data and  $V_s = \pm 25V$ .

If different power supply values are used, different resistors can be used to guarantee the clipping (then the output power), optimizing the signal to noise ratio.

If  $V_{smax}$  is the maximum power supply at which the amplifier must goes into clipping condition, the value of Rgain-X1 is given by:

$$R_{gain-X1} = \frac{(V_{smax} \cdot R_{gain-X2} - 5.1 \cdot R_{gain-X2})}{5.1}$$

Considering  $R_{gain-X2} = 1\text{kohm}$ , the relation become:

$$R_{gain-X1} = \frac{(V_{smax} - 5.1)}{5.1}$$

As example, if  $V_{smax} = \pm 20V$ ,  $R_{gain-L1} = R_{gain-R1} = 2.92\text{kohm} \sim 3\text{kohm}$

### 4.5 Gate driving network

The main purpose of the 27 ohm resistors Rd-N-L, Rd-P-L, Rd-N-R and Rd-P-R are the following:

1. Dumping of the L-C equivalent circuit done by the parasitic inductance and capacitance present in the circuit
2. Reduction of the dv/dt of the Vgs and then reduction of the di/dt of the drain current of the power MOS.

The R-C snubber network done by:

Rs-N-L, Cs-N-L

Rs-P-L, Cs-P-L

Rs-N-R, Cs-N-R

Rs-P-R, Cs-P-R

Are in the direction to increase the dumping (point 1) and reduce the  $dv/dt$  (point 2).

The value of these components is also depending on the layout structure. With a reduction of the parasitic inductance present in the P.C. board layout, in the region around the power transistors, the value of these components can be reduced, giving advantage in terms of THD, mainly at mid-high power levels, due to the reduction of the "dead zone".

The minimum suggested value of  $R_{d-x-x}$  is around 10 Ohm, while, in some cases,  $R_{s-x-x}$  and  $C_{s-x-x}$  can be removed.

## 4.6 PLL

In case of the schematic shown in [Figure 3](#), the internal oscillator is locked by a PLL circuit at the Master Clock input frequency (MCLK).

The loop filter of this PLL is externally connected to the pin F (39). It consists in a lag-lead filter (Cpll1, Rpll). The output resistance of the pin F is a 10K (typ) resistor.

The typical suggested values of Cpll1 and Rpll are the following:

Cpll1 = 10Kpf

Rpll = 1Kohm.

In some cases, in a system with few clock interactions and a good MCLK signal, a parallel capacitor Cpll2 of 2.2nF-4.7nF can help to decrease the noise at the pin F.

With the PLL option, the A.C. output amplitude is not dependant by the resistor  $R_{osc}$ , because the voltage across  $R_{osc}$  is defined by the PLL itself. Moreover, the output A.C. voltage is independent also from the clock of the PCM signal (32kHz, 44.1kHz, 48kHz). Vice versa, if the free running oscillation is selected, the output signal is dependant by the  $R_{osc}$  value and from the input PCM frequency.

## 4.7 Dither

With the pins D1 (43) and D2 (44) 4 types of digital dithering is achievable:

**Table 7. 4 types of digital dithering**

|   | D1 | D2 | Dithering |
|---|----|----|-----------|
| 1 | 0  | 0  | Low       |
| 2 | 0  | 1  | Mid-low   |
| 3 | 1  | 0  | Mid-high  |
| 4 | 1  | 1  | High      |

Because of the recorded signals (music or speech) already contains some amount of noise, the dithering is generally not needed.

For high quality signals, it is suggested do not use the cases 3 and 4, that can be useful only in case of low resolution signals without noise added.



## 4.8 External connections description

### 4.8.1 CD, THWEXT, THWINT

These pins, if used, it must be connected to a pull-up resistor ( $>10\text{k}\Omega$ ) connected to a supply voltage referred to the receiver device (as example, a  $\mu\text{P}$ ).

Maximum voltage = 6V.

### 4.8.2 MUTE

Mute pin

### 4.8.3 ST-BY - St-By pin.

To avoid pop noise due to multiple ST-BY parasitic pulses, an R-C network must be added (as example  $47\text{k}\Omega$ ,  $0.1\mu\text{F}$ )

### 4.8.4 +Vs-low -

This pin supply the low voltage circuits. It can be connected to the +Vs or to a reference voltage comprising between 12V to +Vs.

A connection to +Vs through a  $100\Omega$  resistor, together a  $1\mu\text{F}$  capacitor placed from +Vs-low and GND is possible too.

### 4.8.5 DATA, SEL, SCK

I<sup>2</sup>S digital inputs

### 4.8.6 MCLK

Master clock input. Must be  $F(\text{MCLK}) = 256 \times F_s$  ( $11289.6\text{kHz}$  in case of  $F_s = 44.1\text{ kHz}$ )

### 4.8.7 DGND

Digital ground

### 4.8.8 BRIDGE and L/R

With this pin, the mode of working of the device (bridge or single-ended) can be selected.

If it is connected to the pin 32 (DGND) the device works in single-ended mode

If it is connected to the pin 40 (5Vdig) the device works in bridge mode.

In case of bridge mode, the pin 34 (L/R) makes the channel selection. If connected to DGND, the Left channel is selected. If connected to 5Vdig, is selected the Right channel.

These pins must be selected with the device in ST-BY condition.

In case of single-ended operation, it is suggested to put the L/R pin at 5V.


## 4.9 Components with critical placement and type

- Ci-L1, Ci-L2, Ci-R1, Ci-R2 must be placed as near as possible to the sources of the respective power MOS. If 2 power MOS in parallel are needed, can be useful to place a couple of capacitors for each couple of power MOS. These capacitors are needed to absorb the high  $di/dt$  current present during the Pchannel/Nchannel and Nchannel/Pchannel transition that can cause high peak voltages on the power supply wiring connection due to their parasitic inductance.
- The capacitors placed between +Vs to GND and to -Vs are distributed along the power lines. With P.C. board with very short connections, some of these capacitors can be avoided (Cvs-1, Cvs-2, Cd3, Cd4, Cd8, Cd7).
- The current sensing resistors Rsens-N-L, Rsens-P-L, Rsens-P-R and Rsens-N-R must be not inductive components, as example, made by a constant an wire.

## 5 Package information

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).

**Figure 6. HiQUAD-64 mechanical data and package dimensions**

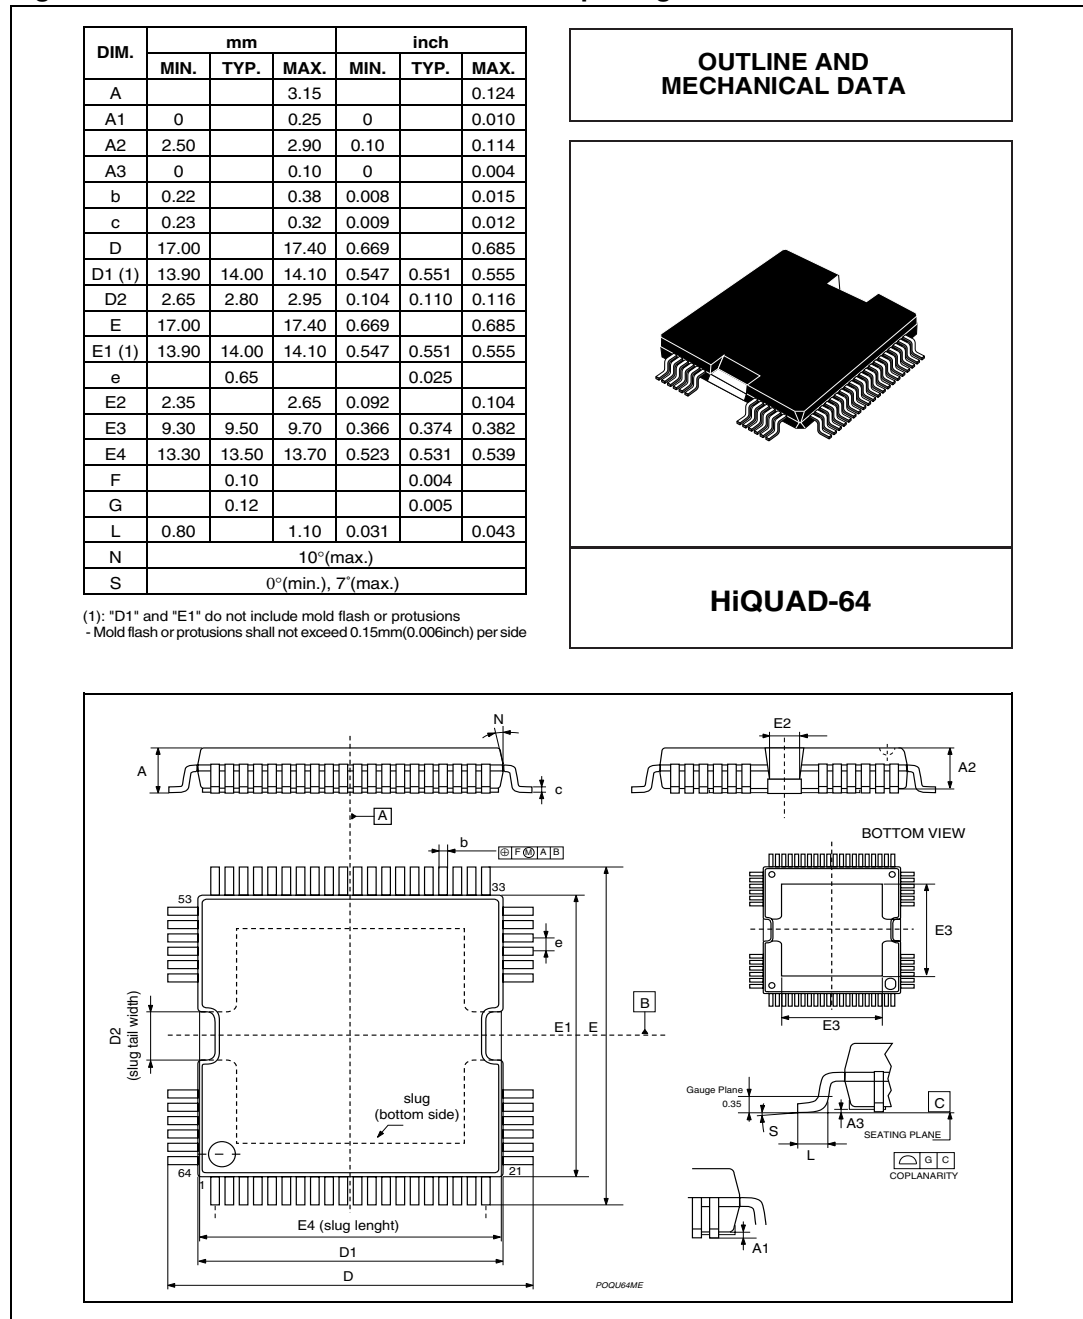

## 6 Revision history

**Table 8. Document revision history**

| Date       | Revision | Changes          |
|------------|----------|------------------|
| 3-Sep-2007 | 1        | Initial release. |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

Find price and stock options from leading distributors for TDA7571 on Findchips.com:

<https://findchips.com/search/TDA7571>

Find CAD models and details for this part:

<https://findchips.com/detail/tda7571/STMicroelectronics>